



SPOSTAMENTO	ANGOLO IN GRADI	RESISTENZA	1/R
0	0	0,829	1,206273
0,75	15	1,086	0,92081
1,5	30	1,435	0,696864
2,25	45	2,29	0,436681
3	60	5,19	0,192678
3,75	75	9,9	0,10101
4,5	90	4,92	0,203252
5,25	105	2,7	0,37037
6	120	1,58	0,632911
6,75	135	1,22	0,819672
7,5	150	1,08	0,925926
8,25	165	1,05	0,952381
9	180	1,12	0,892857
9,75	195	1,34	0,746269
10,5	210	1,83	0,546448
11,25	225	2,87	0,348432
12	240	5,63	0,17762
12,75	255	10,45	0,095694
13,5	270	5,83	0,171527
14,25	285	2,88	0,347222
15	300	1,78	0,561798

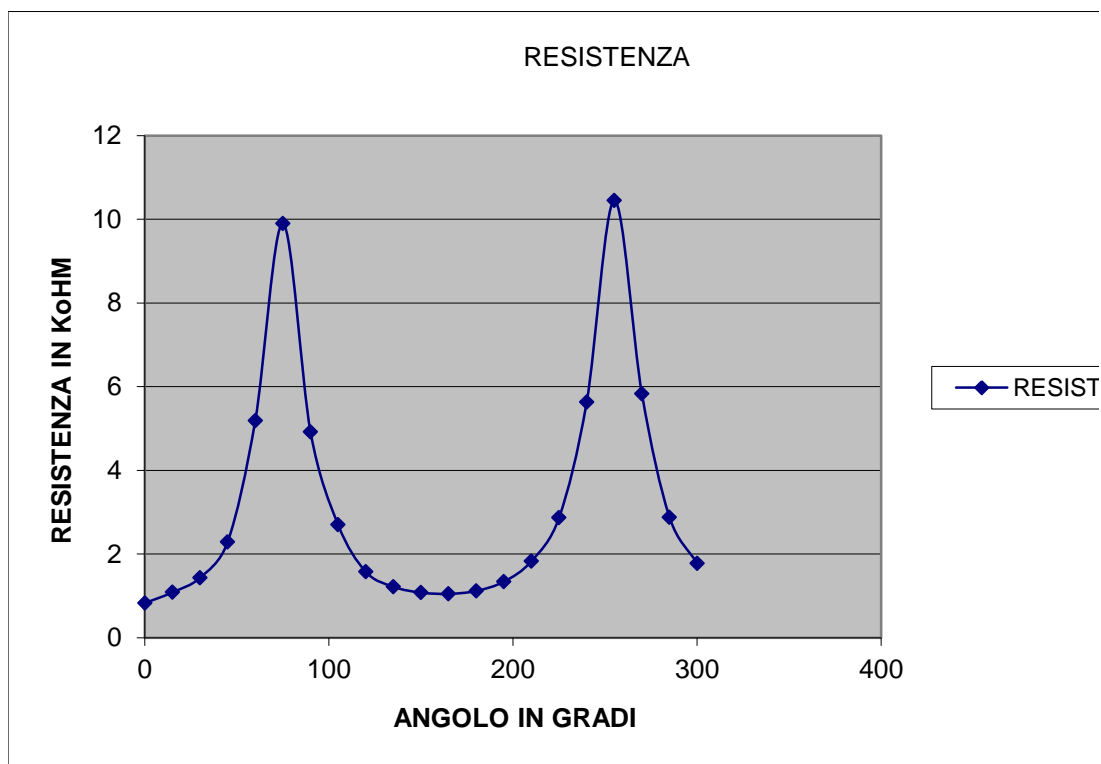

ANGOLO IN RADIANTI	funzione	Differenza valori
0	1,03	-0,176272618
0,261666667	0,96763	0,046819359
0,523333333	0,797214	0,100350104
0,785	0,564371	0,127689866
1,046666667	0,331429	0,1387504
1,308333333	0,160742	0,059731656
1,57	0,098001	-0,105251442
1,831666667	0,16	-0,210370448
2,093333333	0,330144	-0,302767858
2,355	0,562887	-0,256785395
2,616666667	0,795928	-0,129997985
2,878333333	0,966886	0,014504838
3,14	1,029998	0,137140493
3,401666667	0,968369	0,222100802
3,663333333	0,798498	0,252050036
3,925	0,565855	0,217423381
4,186666667	0,332716	0,155096186
4,448333333	0,161488	0,065793904
4,71	0,098005	-0,073521267
4,971666667	0,159262	-0,187960036
5,233333333	0,328861	-0,232936939

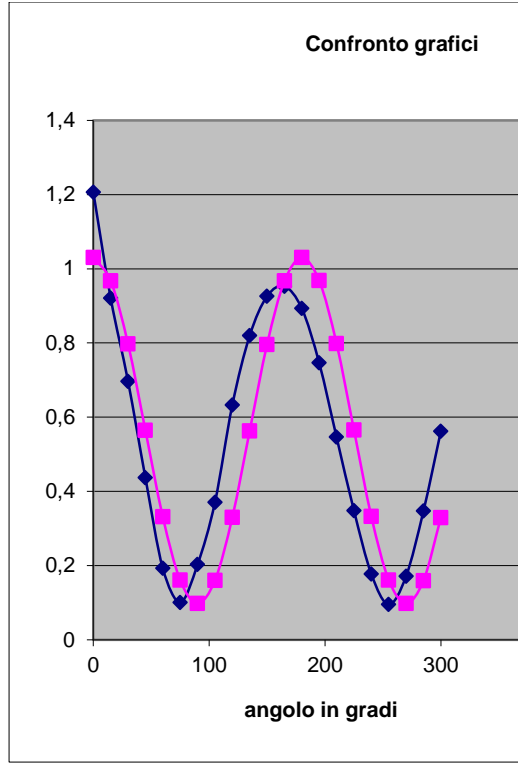

ENZA

